


**AX SERIES**
**105°C Ultra Miniaturized**

- Load Life: 105°C, 1000~2000 hours.
- Suitable for AC-adaptor of portable device.


**◆ SPECIFICATIONS**

Items	Characteristics							
Category Temperature Range	-40~+105°C							
Rated Voltage Range	6.3~35, 400Vdc							
Capacitance Tolerance	±20% (20°C, 120Hz)							
Leakage Current(MAX)	6.3~35Vdc	400Vdc						
	I=0.01CV or 3µA whichever is greater. (After 2 minutes application of rated voltage)							
	I=0.04CV+100µA (After 1 minute application of rated voltage)							
	I=0.02CV+25µA (After 5 minutes application of rated voltage)							
	I=Leakage Current(µA)      C=Capacitance(µF)      V=Rated Voltage(Vdc)							
Dissipation Factor(MAX) (tanδ)	Rated Voltage (Vdc)	6.3    8    10    16    25    35    400						
	tanδ	0.22    0.20    0.19    0.16    0.14    0.12    0.25						
	(20°C, 120Hz)							
Endurance	After applying rated voltage with rated ripple current for specified time at 105°C, the capacitors shall meet the following requirements.							
	Capacitance Change	Within ±25% of the initial value.						
	Dissipation Factor	Not more than 200% of the specified value.						
	Leakage Current	Not more than the specified value.						
	Case Size	Life Time (hrs)						
	L≤7.5	1000						
	L≥9	2000						
Low Temperature Stability Impedance Ratio(MAX)	Rated Voltage (Vdc)	6.3	8	10	16	25	35	400
	Z(-25°C)/Z(20°C)	2	2	2	2	2	2	6
	Z(-40°C)/Z(20°C)	12	12	12	10	8	6	10
	(120Hz)							

**◆ MULTIPLIER FOR RIPPLE CURRENT**

6.3~35Vdc

Frequency (Hz)		120	1k	10k	100k≤
Coefficient	68~82µF	0.21	0.73	0.92	1.00
	150~270µF	0.36	0.73	0.92	1.00
	330~750µF	0.55	0.77	0.94	1.00
	820~1200µF	0.60	0.80	0.96	1.00

400Vdc

Frequency (Hz)		60(50)	120	500	1k	10k≤
Coefficient	4.7~8.2µF	0.65	1.00	1.20	1.30	1.50
	10~24µF	0.80	1.00	1.20	1.30	1.50

**◆ OPTION**


	Code
PET Sleeve	EFC

**◆ PART NUMBER**

□□□	AX	□□□	M	□□□	□□	D×L
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆ **DIMENSIONS**

(mm)

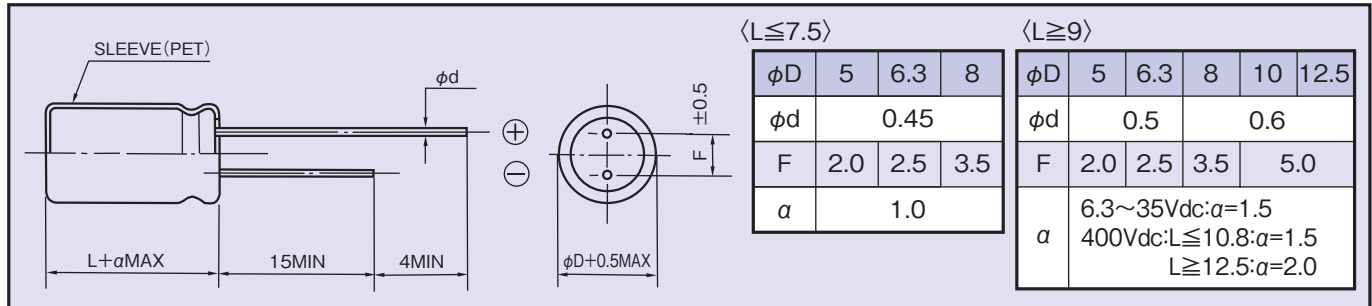

◆ **STANDARD SIZE**

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L(mm)	Rated ripple current (mA r.m.s./105°C,100kHz)	Impedance (Ω MAX/20°C,100kHz)
6.3	82	5×7	510	0.25
	220	5×11	800	0.14
		6.3×7	720	0.13
	470	6.3×11	1140	0.067
		8×7.5	1080	0.065
	680	8×9	1360	0.049
	820	8×10.8	1600	0.042
	1000	8×16	2010	0.027
10×9		1540	0.036	
1200	10×12.5	1970	0.025	
8	75	5×7	510	0.25
	200	5×11	800	0.14
		6.3×7	720	0.13
	390	8×7.5	1080	0.065
	430	6.3×11	1140	0.067
	620	8×9	1360	0.049
	750	8×10.8	1600	0.042
	910	8×16	2010	0.027
		10×9	1540	0.036
1100	10×12.5	1970	0.025	
10	68	5×7	510	0.25
	180	5×11	800	0.14
		6.3×7	720	0.13
	330	8×7.5	1080	0.065
	390	6.3×11	1140	0.067
	560	8×9	1360	0.049
	680	8×10.8	1600	0.042
	820	8×16	2010	0.027
		10×9	1540	0.036
1000	10×12.5	1970	0.025	

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L(mm)	Rated ripple current (mA r.m.s./105°C,100kHz)	Impedance (Ω MAX/20°C,100kHz)
16	390	8×9	1360	0.049
	470	8×10.8	1600	0.042
	560	8×16	2010	0.027
		10×9	1540	0.036
	680	10×12.5	1970	0.025
	1000	10×16	2480	0.019
25	220	8×9	1360	0.049
	270	8×10.8	1600	0.042
	390	8×16	2010	0.027
		10×9	1540	0.036
	680	10×16	2480	0.019
35	150	8×9	1360	0.049
	180	8×10.8	1600	0.042
	220	8×16	2010	0.027
		10×9	1540	0.036
	270	10×12.5	1970	0.025
	390	10×16	2480	0.019

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L(mm)	Rated ripple current (mA r.m.s./105°C,120Hz)
400	4.7	6.3×14	50
		8×9	
	6.8	8×10.8	70
	7.5	8×10.8	75
	8.2	8×16	85
		10×9	
	10	8×16	90
		10×12.5	100
	12	8×20	120
		10×12.5	110
	15	8×20	130
		10×16	150
	18	10×16	150
	22	12.5×16	180
24	12.5×16	190	