

SKV SERIES

105°C Standard

*Load Life : 105°C 1000 hours.




◆ SPECIFICATIONS

Items	Characteristics																												
Category Temperature Range	-55~+105°C																												
Rated Voltage Range	6.3~50Vdc																												
Capacitance Tolerance	±20% (20°C, 120Hz)																												
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)																												
Dissipation Factor(MAX) (tanδ)	<table border="1"> <thead> <tr> <th>Rated Voltage (Vdc)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td colspan="6">(20°C, 120Hz)</td> </tr> <tr> <td>φ4~φ6.3</td> <td>0.30</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> <tr> <td>φ8, φ10</td> <td>0.35</td> <td>0.26</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </tbody> </table>	Rated Voltage (Vdc)	6.3	10	16	25	35	50	tanδ	(20°C, 120Hz)						φ4~φ6.3	0.30	0.24	0.20	0.16	0.14	0.12	φ8, φ10	0.35	0.26	0.20	0.16	0.14	0.12
Rated Voltage (Vdc)	6.3	10	16	25	35	50																							
tanδ	(20°C, 120Hz)																												
φ4~φ6.3	0.30	0.24	0.20	0.16	0.14	0.12																							
φ8, φ10	0.35	0.26	0.20	0.16	0.14	0.12																							
Endurance	<p>After applying rated voltage with rated ripple current for 1000 hrs at 105°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±30% of the initial value. (φ8,10:±25%)</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 300% of the specified value. (φ8,10:200%)</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </tbody> </table>	Capacitance Change	Within ±30% of the initial value. (φ8,10:±25%)	Dissipation Factor	Not more than 300% of the specified value. (φ8,10:200%)	Leakage Current	Not more than the specified value.																						
Capacitance Change	Within ±30% of the initial value. (φ8,10:±25%)																												
Dissipation Factor	Not more than 300% of the specified value. (φ8,10:200%)																												
Leakage Current	Not more than the specified value.																												
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (Vdc)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>8</td> <td>8</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated Voltage (Vdc)	6.3	10	16	25	35	50	Z(-25°C)/Z(20°C)	4	3	2	2	2	2	Z(-40°C)/Z(20°C)	8	8	4	4	3	3							
Rated Voltage (Vdc)	6.3	10	16	25	35	50																							
Z(-25°C)/Z(20°C)	4	3	2	2	2	2																							
Z(-40°C)/Z(20°C)	8	8	4	4	3	3																							


◆ MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	60(50)	120	500	1k	10k≤
0.47~1μF	0.50	1.00	1.20	1.30	1.50
2.2~4.7μF	0.65	1.00	1.20	1.30	1.50
10~47μF	0.80	1.00	1.20	1.30	1.50
100~1000μF	0.80	1.00	1.10	1.15	1.20

◆ MARKING




◆ PART NUMBER



◆ DIMENSIONS

(mm)

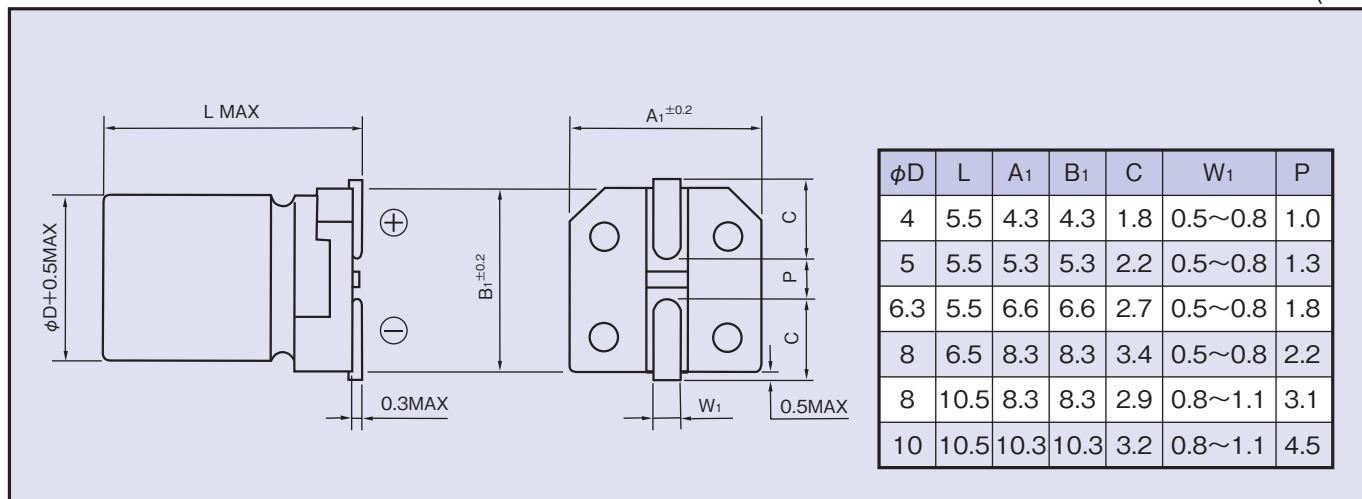

◆ STANDARD SIZE

Size φD×L(mm), Rated Ripple Current (mA r.m.s./105°C, 120Hz)

Vdc Cap(μF)	6.3		10		16		25		35		50	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47											4×5.5	4.0
1											4×5.5	8.0
2.2											4×5.5	11
3.3											4×5.5	13
4.7									4×5.5	14	5×5.5	18
10					4×5.5	20			5×5.5	24	6.3×5.5	28
22	4×5.5	23			5×5.5	31			6.3×5.5	46	8×6.5	70
33			5×5.5	34			6.3×5.5	48			8×10.5	135
47	5×5.5	37			6.3×5.5	56					8×10.5 10×10.5	155 180
100	6.3×5.5	57			6.3×5.5	65	8×6.5 8×10.5	118 180	8×10.5 10×10.5	180 305	8×10.5 10×10.5	200 315
220	6.3×5.5	74			8×10.5	185	8×10.5 10×10.5	190 353	10×10.5	360		
330			8×10.5	195	8×10.5 10×10.5	195 440	10×10.5	450				
470	8×10.5	210	8×10.5 10×10.5	210 440	10×10.5	460						
1000	10×10.5	480										